



Better Than The Best...



The way to get clear picture from the sky

7, P.P. Lane, S.P. Road Cross, Bangalore - 560 002.

Ph : +91 80 2223 2749, +91 80 2222 0364, +91 80 4151 9912.

Fax : +91 80 4151 9913. Email : skywayint@rediffmail.com

Optinet Plug-in Fixed Type Attenuators

Features

- 1) Environmentally stable
- 2) Easy Installation
- 3) Custom Designed Specifications
- 4) Low Return Loss
- 5) Readily Panel Mountable
- 6) Compact Packaging


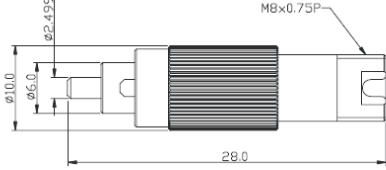

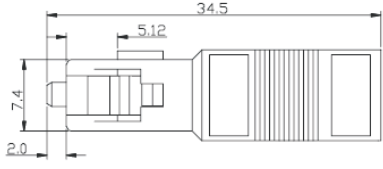

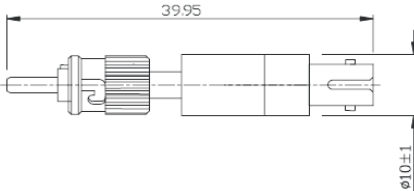

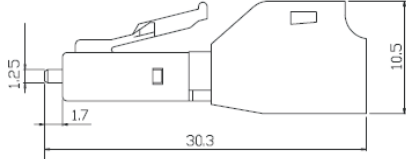

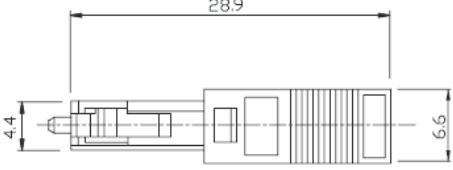
Applications

- 1) Telecommunications
- 2) LAN & CATV
- 3) Optic Fiber Sensors
- 4) Testing Instruments
- 5) Fiber to the home
- 6) Multi-Channel Subscriber loop
- 7) Optical Transmission System

Specifications

Mode Type	SM	
Attenuation(dB)	UPC,APC	1-30dB (1dB incremental)
Operating wavelength(nm)	1310 and 1550	
Return Loss(dB)	UPC	>50
	APC	>60
Tolerance on attenuation(dB)	1-10dB	>±0.5
	>10dB	>±1.0
Polarization Dependent(dB)	<0.2	
Operating Temperature(°C)	-40~+75	
Connector Type	FC/UPC, SC/UPC, ST/UPC, LC/UPC, MU/UPC , FC/APC, SC/APC, LC/APC	

Unit: mm

	 <p>Attenuator(Plug-in type):FC/PC, FC/APC, Single Mode</p>
	 <p>Attenuator(Plug-in type):SC/PC, SC/APC, Single Mode</p>
	 <p>Attenuator(Plug-in type):ST/PC, Single Mode</p>
	 <p>Attenuator(Plug-in type): LC/PC, Single Mode</p>
	 <p>Attenuator(Plug-in type): MU/PC, Single Mode</p>